

AUTONOMOUS ROBOT FOR URBAN WASTE COMPACTING

Bruno Seixas Gomes de Almeida

Ivan Barbosa Couto Neto

Federal University of Rio de Janeiro – UFRJ, Mechanical Engineering Department
brunoseixas@poli.ufrj.br; bamdebike@poli.ufrj.br

Armando Carlos de Pina Filho

Federal University of Rio de Janeiro – UFRJ, Urban Engineering Program
armando@poli.ufrj.br

Aloísio Carlos de Pina

Federal University of Rio de Janeiro – UFRJ, Computational Science Department
aloisiopina@dcc.ufrj.br

Abstract. Nowadays, there are robots in the market to automate several household tasks, such as: vacuum cleaners, lawn mowers, pool cleaners, etc. In relation to the urban waste management, the applicable processing ways and final disposal are: compaction, shredding, incineration and landfill. The compaction process aims at reducing the initial volume of waste, favoring their subsequent transportation and final disposal. This task is only performed after the waste collecting from a residence. However, this process could be started from home, through the use of an autonomous robot capable of performing the waste compacting, which motivated this research. Therefore, the objective of this work is to present the design of this robot. Initially, it was determined the type of waste to be compressed and its disposal in the dump. Then, the systems were studied: hydraulic, driving, electronic and control. In the hydraulic system were specified hydraulic actuators, valves, pump and motor. In the driving system was determined the type of wheel and the most suitable configuration for the robot, as well as the motor (coupled to a reduction system). In the electronic and control system were chosen the robot sensors, the controller board (Arduino), the control logic and programming. The elements that make up the compactor robot can be easily found in the market, with estimated final cost not too high, which enables its production. The project benefits are: the waste arrive semi-processed in the treatment plant; a single collecting waste truck can cover a larger area, since it could carry a greater amount of waste per journey; greater availability of street cleaners to work in other parts of the city; and easier to treat in landfills.

Keywords: home automation, urban waste management, mechatronic design.

1. INTRODUCTION

One of the main problems found in cities, especially in the big cities, is waste, result of a society that consumes more each day. This process derives from the accumulation of waste that doesn't always have an adequate place and treatment. This tends to increase, as the population grows and generates an increase in consumption. As an example, we have the city of São Paulo, where in average each person produces between 800g and 1kg of garbage daily, or from 4 to 6 liters of waste, each day 15,000 tons of waste are generated, which corresponds to 3,750 trucks loaded per day (de Freitas, 2012). The waste, besides being an environmental problem in Brazil, can also be considered an economical problem, involving high expenses for its removal. A simple act of throwing a piece of paper in the street entails the hiring of thousands of street sweepers, the production of millions of kilos of garbage and risks to the human health.

There are many forms of treatment, processing and final disposition applicable to urban waste. In most cases, those forms are associated. The most common ones are: Compaction, Shredding, Incineration, Landfill. The Compaction process consists of a processing that reduces the initial volume of waste from 1/3 to 1/5, favoring its later transport and final disposition. The great advantage of this process is that it can be made while still in the residence, before the waste is transported to a treatment station and, afterwards, to the landfill. With the compacting waste, occupying least space, the filling time of the landfills is increased, prolonging their useful storage time.

The compaction can be derived from different types of systems: mechanical, pneumatic or hydraulic system. These systems transmit the movement to the compaction mechanism. This can be done in different ways: horizontally or vertically. In Fig. 1 are shown two of the most used forms of compaction.

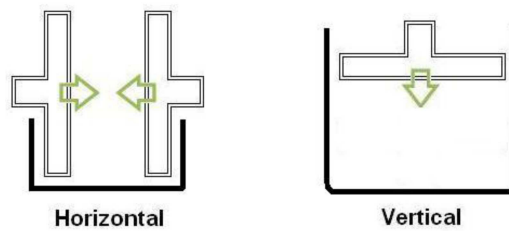


Figure 1. Compaction types.

For the proposed project, we chose to use the vertical compaction in the descending way, because it has as an advantage the gain in available space to put the garbage, since all of the electrical and mechanical system is situated in the superior part of the equipment. Moreover, we chose to use a hydraulic system, since it exhibits a better balance of efforts and can reach, in most cases, higher pressures.

Thus, the objective of the project is to develop a waste compactor robot for residential use, which should be able to, once put into operation, recognize the trash can in a residency, move towards it and start the compaction process of the residue found in it. Then the robot should go to other trash cans, continuing the compaction process. After finishing these tasks, the user would be able to take the garbage out of the trash can, already in a pretreated stage.

In order to facilitate the implementation of the project, we identified three systems that make up the robot. The study of each system has a specific purpose, namely: **Compaction System**, step performed in order to verify the possible compaction mechanisms, determine the elements that compose it and measure them; **Locomotion System**, step aiming to determine the most appropriate configuration to the robot's movement, as well as to size the elements which make up such a system; **Electronic and Control System**, step where the sensors, actuators and electrical controllers required for the recognition of the trash can and the robot's movement in the residence were determined. At the end of every stage, the **Robot Modeling and Simulation** was performed, in which the elements previously set out were modeled and it was verified the resistance of some components.

2. COMPACTION SYSTEM

The vertical compaction hydraulic system comprises a hydraulic actuator, a control valve, a hydraulic pump, electric motor, hydraulic fluid and hydraulic liquid deposit. To be able to scale these elements, it is necessary first to identify the project boundary conditions.

2.1 Project Conditions

Initially it is necessary to characterize the type of waste to be compressed. In general, urban waste is a composite of organic and inorganic residues. For this project, we chose to work essentially with the waste type "soda cans", as this type of waste is one of the most difficult to be compressed and is very common in urban waste. Some studies (de Oliveira, 2012) shows that the required force to compress a soda can is 4.6 kN (Fig. 2). This force is sufficient to compress a can of approximately 0.125 m to 0.035 m high.

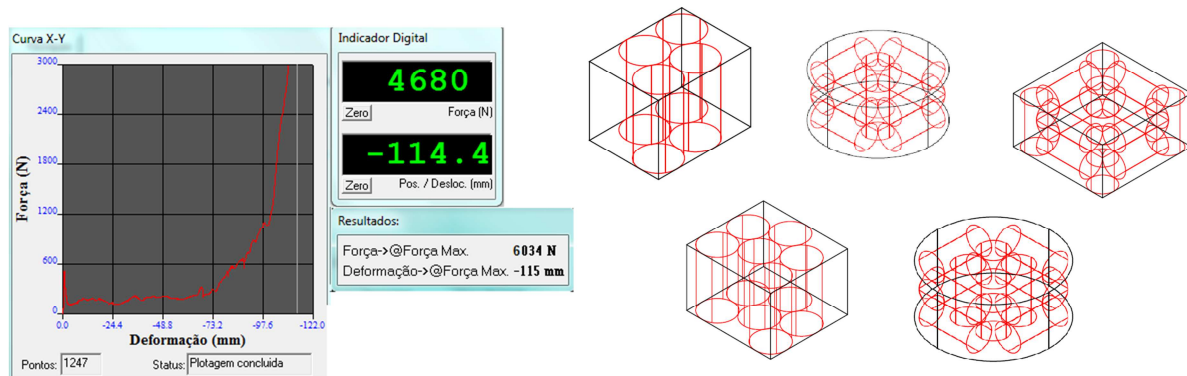


Figure 2. Force needed to compress a can and study of the trash can dimensions.

Once determined the force needed to compress a can, it was necessary to determine the total number of cans to be compressed, which depends on the size of the trash can. In this case an optimization study with several trash cans of various sizes was conducted, until we reached a trash can with 0.100 m in diameter and 0.246 m high, occupied by a

maximum of 14 cans. Thus, the maximum force needed to be made by the actuator will be the product of the number of cans by the force required by each one.

$$F_{total} = 4.6 \times 14 = 64.4 \text{ KN} \quad (1)$$

2.2 Hydraulic Actuator

Hydraulic actuators transform the hydraulic work into linear mechanical energy, which is applied to a resistive object to perform work. For this project, since the actuator will need to return to its original position after compaction and since it will be installed in the robot vertically, we opted for the double-acting actuator in which the fluid pressure is applied to the mobile element in either directions, as shown in Fig. 3.

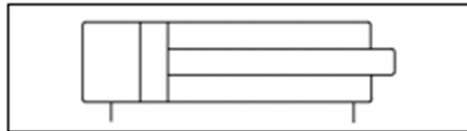


Figure 3. Double acting cylinder.

Once determined the strength required for the compression, by Eq. (1), it is possible to determine the pressure required to act on the system. Taking into account the diameter of the plunger 0.1 m, the pressure is given by:

$$P = \frac{0.1 \times 4 \times F}{\pi \times d^2} = \frac{0.1 \times 4 \times 64400}{\pi \times 0.1^2} = 820 \text{ MPa} \quad (2)$$

Where: P is the fluid pressure [MPa], F is the Pressure Force on the piston [N] and d is the piston diameter [m].

Then, to determine the course that the hydraulic piston will take, it was assumed that the can compresses 75%, that is, its original length is 0.123 m and the final length will be 0.031 m. As there will be two layers of cans, the course will be $0.246 - 0.062 = 0.184$ m. However, a gap will be added to this value, equal to 0.016 m for calculation purposes. This gap was adopted in order to avoid any interference. In this case, the total piston stroke is 0.2 m.

In order to determine the geometry of the plunger rod, we can use the Euler criterion to calculate the axial force imposed on it. According to the Euler method (Linsingen, 2003), the plunger rod can be expressed by Eq. (3). In the equation, dh is the rod diameter, S is the safety coefficient, E is the Material's Elastic Modulus, F_a is the Axial Force and λ is the buckling length factor. For the material's elasticity module, we used the steel module, whose value is 2.1 MPa. According to the Euler method, in order to avoid the consequences and other problems of assembling, we used a safety factor of the order of 3.5. To determine the buckling length factor, you must first analyze the type of assembly to be made. In the project, the robot has one fixed extremity and another movable, which will move to compact the waste. In this case, from Fig. 4, $\lambda = 2L$.

EULER				
Euler Load	Case 1 One movable extremity and one fixed	Case 2 Two articulated extremities	Case 3 One articulated extremity and one fixed	Case 4 Two extremities fixed
Representation				
BUCKLING LENGTH FACTOR				
Assembly Situation for Hydraulic Cylinders	$\lambda = 2 L$	$\lambda = L$	$\lambda = L \cdot (0,5)^{0,5}$	$\lambda = L/2$

Figure 4. Free buckling length depending on the type of assembly (Cordeiro, n.d.).

$$dh = \sqrt[4]{\frac{64 S \lambda^2 F a}{\pi^3 E}} = 0.024 \text{ m} \quad (3)$$

Therefore, 0.024 m is the minimum value to be considered for the diameter of the rod. It was decided to adopt the value of 0.04 m for this diameter for calculation purposes.

The advance and return speed of the hydraulic cylinder can be determined from the relation in Eq. (4):

$$V_{a/r} = \frac{D}{\Delta t a \text{ ou } \Delta t r} = 0.04 \text{ m/s} \quad (4)$$

Where: D is the displacement of the piston (0.2 m), $\Delta t a$ is the time variation in the advance (taken as 5 s) and $\Delta t r$ is the time variation in the reverse (taken as 5 s).

The forward flow rate is the flow rate required for the cylinder to, when slackening, reach the speed (V_a).

$$A_p = \frac{\pi D_p^2}{4} = 7.85 \times 10^{-3} \text{ m}^2, \quad Q_a = V_a \cdot A_p = 3.14 \times 10^{-4} \text{ m}^3/\text{s} \quad (5)$$

Where: V_a is the advance speed, D_p is the diameter of the piston and A_p is the piston area.

The return flow rate is the flow rate required for the cylinder to, as it returns; reach the speed (V_r).

$$A_c = \frac{\pi(D_p^2 - dh^2)}{4} = \frac{\pi(0.1^2 - 0.04^2)}{4} = 6.60 \times 10^{-3} \text{ m}^2, \quad Q_r = V_r \cdot A_c = 2.64 \times 10^{-4} \text{ m}^3/\text{s} \quad (6)$$

Where: V_r is the return speed, D_p is the diameter of the piston and dh is the diameter of the rod.

2.3 Directional Control Valve

A control valve allows you to control the flow of a pipe usually through an obstruction in its path. The valves may have numerous pathways that are the oil inlets in the valve and exhibit directions, representing the number of positions the valve can take that will determine the direction that the fluid will take.

The double-acting actuator chosen in the project will require a 4-way valve, which provides flow control on each cylinder entry. The valve will operate in three positions. Two positions are able to control only the advance and return of the cylinder, and a third position to be able to control the cylinder in a support position. Therefore, the selected valve is of the type 4 ways x 3 positions.

2.4 Hydraulic Fluid and Hydraulic Liquid Deposit

For the hydraulic system, the SAE 68 mineral oil was chosen as the hydraulic fluid. Its density is 877 kg/m³ and the dynamic viscosity is 0.596 Kg/(ms). Following the recommendation of some authors (Will *et al.*, 2007) for operations with pump, the reservoir volume should be between 1 to 3 times the flow of the fluid pumped given in l/min. Thus, it was decided to use 2 times that value. Therefore, it is recommended that the reservoir has 37.68 l. For better accommodation within the robot, such reservoir may have an irregular shape that has a better fit in the geometry of the robot. Furthermore, the use of a filter element is recommended to prevent particles from entering the system.

2.5 Hydraulic Pump

Pumps are hydraulic machines that receive potential energy (driving force of an engine or turbine), and transform part of this power into kinetic energy (movement) and pressure energy (power), giving these two energies to the pumped fluid, in order to recirculate it or transport it from one point to another. The pumps can be classified as centrifugal or volumetric. The rotary volumetric pumps of the gear type are the most popular for the displacement and pressurization of oil-based hydraulic circuits, due to lower cost, higher power per weight, among other advantages. This type of pump was selected for the system.

An important factor to be determined for hydraulic systems is the pump power. Initially it was determined the losses in the hydraulic pipeline and it was calculated the estimated value of 364 MPa for pressure drop. Therefore, the pump power can be calculated by the Eq. (7):

$$Pot_{pump} = \frac{Q \cdot \Delta P}{\eta_t} = \frac{3.14 \times 10^{-4} \cdot 364 \times 10^3}{0.80} = 143 \text{ W} \quad (7)$$

Where: ΔP is the pressure drop [Pa]; η_t is the total efficiency [0.80]; Q is the pump flow [m³/s] and Pot_{pump} is the absorbed power [W].

2.6 Electric Motor

An electric motor is a machine designed to transform electrical energy into mechanical energy. It is the most used of all types of engines, because it combines the advantages of electrical energy - low cost, ease of transport, cleanliness and command simplicity - with its simple construction, reduced cost, great versatility to adapt to all kinds of load and better performance. These engines are found in various settings, varying mainly the type (of continuous or alternating current) power, voltage, speed and appropriate controls. For the sizing of the required power of an engine, it is necessary to check the performance provided by the engine manufacturer. The performance varies with the engine load. Assuming 80% efficiency for the engine, the power is given by Eq. (8):

$$Pot_{motor} = \frac{Pot_{pump}}{\eta m} = \frac{143}{0.80} = 178.75 \text{ W} \quad (8)$$

Where: Pot_{motor} is the power required at the pump, Pot_{pump} is the absorbed power in the pump, and ηm is the engine efficiency.

3. LOCOMOTION SYSTEM

A mobile robot needs mechanisms that allow its mobility throughout the environment. However, there are several possible ways to move; therefore, this selection is an important aspect of the mobile robot project. In order to define the type of robot locomotion, it is necessary to analyze the kinematic and dynamic characteristics desired and its main points. In the stability, analyze the number and the geometry of contact points, the center of gravity, the static or dynamic stability and the inclination of the terrain; in the type of contact, check the contact point or size and the shape of the path, the angle of contact and the friction; for the type of environment, structure and texture. Initially the element that would allow the robot to move in the environment was determined. Then the engine required to trigger such a system was determined.

3.1 Wheels

The wheel is the most popular locomotion mechanism in mobile robotics. The balance is generally not a problem for robots which use wheels, because they are designed to allow the wheels to be in contact with the ground at the same time. Wheels are simple and adjust themselves on flat ground, such as in a residence, considered in the project.

To achieve static stability at least two wheels are required, but in such circumstances, exorbitant diameters are required. To avoid the problem, at least three wheels are used, with the center of gravity located in the triangle formed by the wheels. Improved stability can be obtained by adding more wheels, although the hyperstatic nature of this geometry requires some form of flexible suspension on uneven ground, which does not fit in this project.

Considering the functions of the robot, the movement in the residence, a flat and simple ground, and waste compaction, the best option is the model with four wheels, ensuring greater stability, especially at the time of compaction. Therefore, two driving standard type wheels and two moved wheels will be used.

3.2 Electric Engine Determination

In order to determinate the electric motor and the reduction (if necessary), first we need to determine the torque for the robot's locomotion. By determining the torque, it is possible to analyze, through specific graphics of engines, the project's components. At first, it is necessary to find the resulting weight of the structure to determine the load applied to each wheel. Considering the acceleration of gravity (g) 9.81 m/s^2 and the estimated mass (m) 38 kg, the weight is:

$$P = m \times g = 38 \times 9.81 = 372.78 \text{ N} \quad (9)$$

In this case, it is necessary to determine the rolling resistance since it is considered that the rolls will run without slipping. Thus, the force is given by Eq. (10), where N is the normal force and c is rolling resistance coefficient. It was considered the value of 0.0012 for the rolling resistance coefficient.

$$Fr = cN = 0.0012 \times 372.78 = 0.447 \text{ N} \quad (10)$$

Considering two driving wheels, the value of the total frictional force (Fr) should be divided between them, that is, 0.224 N, and the wheel diameter (d) equal to 0.1 m, it follows that the torque is:

$$T = F \times d/2 = 0.224 \times 0.05 = 0.011 \text{ Nm} \quad (11)$$

Each engine features a chart that lists some parameters, such as torque (T), rpm (N), current (I) and efficiency (η), and should be analyzed before your choice. Therefore, knowing the torque required to move, we might determine other parameters, such as rotation and current, important variables to set the reduction and driver in which the engine is plugged in. It is recommended to use an engine that reaches a torque above the calculated, in order to ensure that the robot can actually move.

4. ELETRONIC AND CONTROL SYSTEM

The choice of the electronic components of the robot is conditioned by the way it will behave in the environment and how it will react to the external stimulus. Hereafter the robot operating logic will be displayed, as well as the electronic components that were selected for use in this project, such as the sensors Arduino, shield and driver.

4.1 Operating Logic

To carry out the trash compaction, the robot should be able to identify the trash can, fit in it, activate the hydraulic actuator, return the actuator, disengage from the trash can and move towards another trash can. In order to prevent the robot to rise during the compression process, it was placed a rod at the base of the robot structure that fixed up properly in the trash basis. Figure 5 illustrates the coupling detail between the base of the robot structure and the basis of the trash.

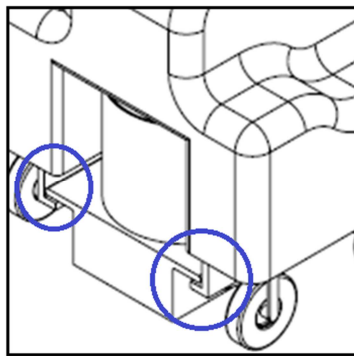


Figure 5. Coupling detail.

Since the electronic interface of the project and its programming are not the main target of this project, we chose a simpler and executable programming logic. In this case, the type of movement of the robot through the residence will be in the form "line follower". The robot will move on a line previously marked on the ground, that will link the trash cans, and this movement will occur due to the sensors arranged in the base of the robot that will trigger the engine if any of them enters or leaves the demarcated line. Figure 6 shows the operating logic of the compactor robot.

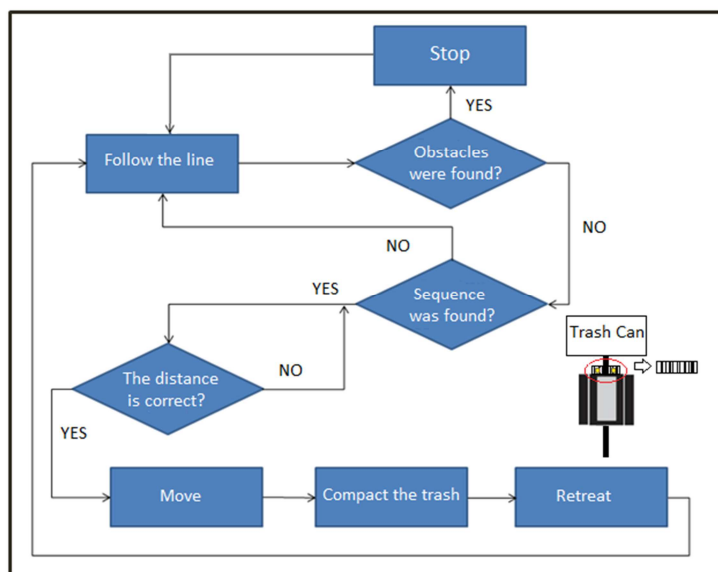


Figure 6. Flowchart of the robot's operations.

4.2 Sensors

There is a wide variety of sensors that are used in mobile robots. Some sensors are used to measure simple variables, such as the internal temperature of the electrical circuit or the engine rotation speed. Other sensors, more sophisticated, can be used to acquire environmental information. A robot, while moving, can find unpredictable environmental characteristics and their detection is a critical factor to be considered in the project.

For the compactor robot, two types of sensors will be needed to perform the operations. To identify the sequence delimited on the ground, light sensors will be used, whose operation is based on the emission of a light beam, which is received by a photosensitive element. One can also use line sensors. To determine precisely the distance to the trashcan, ultrasound sensors will be used, which are based on the emission of high-frequency sound waves and on the measurement of the time that the produced echo takes to return to the receiver. To measure the distance, infrared type sensors can also be used, which have a similar operation to that of the ultrasound, but, instead of a sound wave, a light beam is emitted, which is more accurate.

4.3 Arduino, Shield and Driver

Arduino is an electronic platform for prototyping, consisting of a microcontroller board, a typical programming language with an environment of development and support to the input and output of data and signals. It is very flexible and does not require deep knowledge about electronics. In addition, software, libraries and hardware are open-source, meaning that they can be reproduced and used without the need of copyright payment.

The Arduino UNO will be used for the project, due to its simplicity and flexibility. It is recommended to use a Shield (plate that attaches to the original plate, adding other features) coupled to the Arduino, in order to facilitate the use of the components. The hardware Arduino UNO consists of power supply, CPU core, analogue and digital inputs and outputs, special pins and firmware.

The Driver will be connected to the engines that will allow the movement of the robot. For this, we must determine the amperage required to activate the engine, which was previously analyzed from the graph provided by the engine manufacturer.

5. ROBOT MODELING AND SIMULATION

The modeling of the components present in the trash compactor robot was carried out. The division of the components was done according to the robot system. For the compaction system, the hydraulic piston, the hydraulic pump, the electric engine and the 4 ways x 3 positions valve were modeled. For the locomotion system, the driving wheels, the moved wheels and the electric engine were modeled, and for the electronic and control system, the battery and the Arduino were modeled. Finishing the modeling of the robot, we built the outer structure for final assembly, seeking a suitable design (Fig.7).

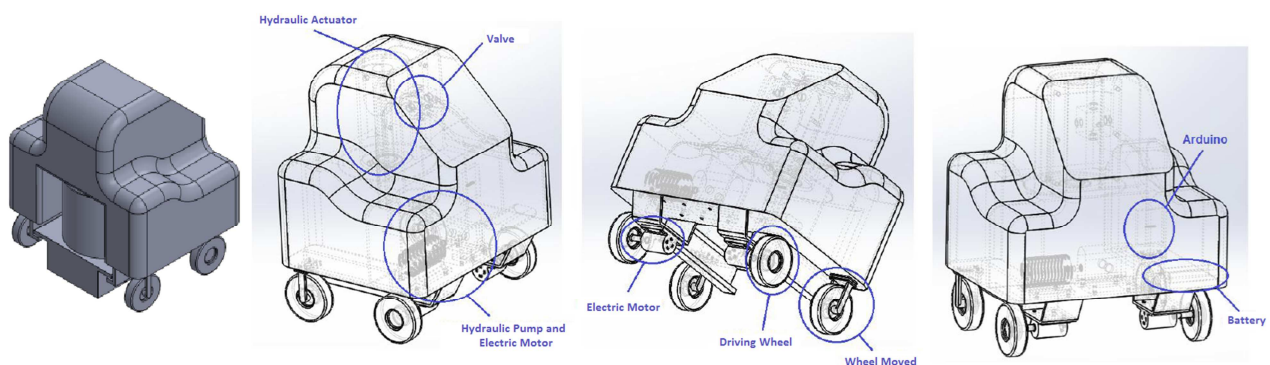


Figure 7. Modeling of the robot's system.

Since there will be an effort on the robot casting rod that engages the trash and also an effort on the trash basis, it is necessary to carry out a simulation of finite element and check the behavior of the material. Therefore, it was decided to consider the material of the base of the robot structure and the base of trash an SAE 1040 steel quenched and tempered at 205°C, whose modulus of elasticity is 207 GPa, Poisson's ratio is approximately 0.3 and the flow resistance limit is 593 MPa. The software used was the *Catia V5®* to perform finite element simulations. It calculated the mechanical stress in the material through the Von Mises Criteria. The results are shown in Figure 8.

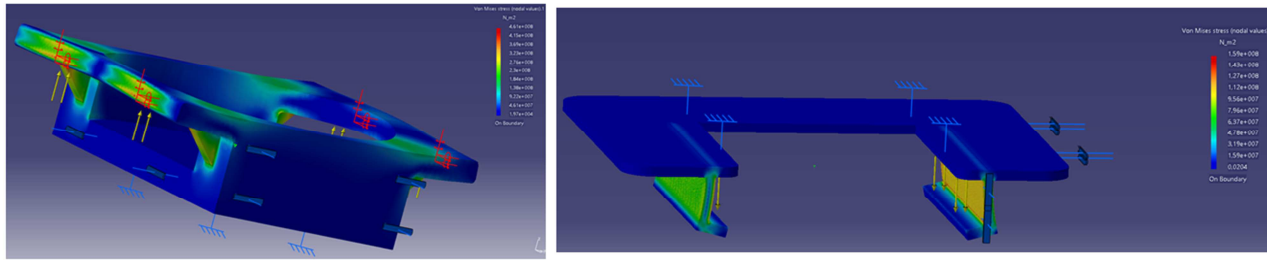


Figure 8. Simulation results.

From simulation, it is possible to verify that the higher tension applied in the base of the robot structure was 159 MPa, while in the base of trash was 461 MPa. Thus, as the endurance limit the flow of material used is 593 MPa, it can be concluded that the material will present a very small elastic deformation, which is annulled when the stress is terminated. Therefore the selection of the material was appropriated for the elements that will resist the applied load.

6. CONCLUSION

With the present work, it was possible to define the required components to compose an autonomous robot for urban waste compacting. For each system it was determined the mechanical elements. For the Compaction system, the hydraulic actuator, the valve, the hydraulic pump and the electric motor were selected. For the Locomotion System, the driving wheels, the moved wheels and the electric motor were selected, and, for the Electronic and Control System, the electronic board, the operating logic, the sensors and the electronic devices were defined. One of the great advantages of this study is the fact that the elements that make up the compactor robot can be easily found in the market, with reasonable estimated final cost, which enables its production. As benefits for the use of this robot we have: the waste arrives semi-processed in the treatment plant; a single collecting waste truck can cover a larger area, since it could carry a greater amount of waste per journey; greater availability of street cleaners to work in other parts of the city; and easier to treat in landfills.

7. ACKNOWLEDGEMENTS

The author Bruno Seixas Gomes de Almeida is grateful to CNPq and UFRJ for the financial support provided during the course of this work.

8. REFERENCES

- Amaral, J.P.L., 2008. *Desenvolvimento de um compactador de lixo doméstico*. University of Aveiro, Department of Mechanical Engineering.
- Cordeiro, L.C., n.d. *Instalações Mecânicas e Industriais*. Technology School Uerj. Resende, Brazil.
- Duarte, M., 2013. *Lixo Urbano*. 22 Dec. 2013 <<http://www.infoescola.com/meio-ambiente/lixo-urbano>>
- de Freitas, E., 2012. *Os problemas Provocados pelo lixo*. 20 Dec. 2013 <<http://www.mundoeducacao.com/geografia/os-problemas-provocados-pelo-lixo.htm>>
- Falco, R.de, 1998. *Bombas Industriais*. Editora Interciência. 2th ed. Rio de Janeiro, Brazil.
- Gozzi, G., n.d. *Sensores e Programação de Robôs*. Industrial Automation course.
- Graminho, C.A., 2009. *Projeto e especificação de um sistema hidráulico para acionamento de um elevador de cargas*. Mechanical Engineering Course. Parambi, Brazil.
- Hatami, H., 2013. *Coletânea de Fórmulas Hidráulicas*. Rexroth Bosch Group.
- Junior, A., 2008. *Projeto de um prensa de lata utilizando parafuso de potência por compressor*. Federal University of Bahia, Department of Mechanical Engineering.
- Linsingen, I.von, 2001. *Fundamentos de Sistemas Hidráulicos*. UFSC. Florianópolis, Brazil.
- de Oliveira, M.L., 2012. *Aplicação de um método Construtivo de Pneumática*. Federal University of Santa Maria. Santa Maria, Brazil.
- Siegwart, R., Noubakhsh, I.R, 2004. *Introduction to autonomous mobile robot*. MIT Press.
- Vasiljevic, G., 2013. *Apostila de Arduino*.
- Will, D., Gebhardt, N., Ströhl, H., 2007. *Hidraulik - Grundlagen, Komponenten, Schaltungen*. Springer Verlag.

9. RESPONSIBILITY NOTICE

The authors are the only responsible for the printed material included in this paper.